



RG-P-780




锐捷®





-
-
-



1.



2.



3.





1

1.1

-
-
-
-

1.2

-
-
-
-
-
-



1.3

BSSID

1.4

-
-
-
-



2



}
u

2.1 FCC


-
-
-
-



u

2.2 IC


-
-

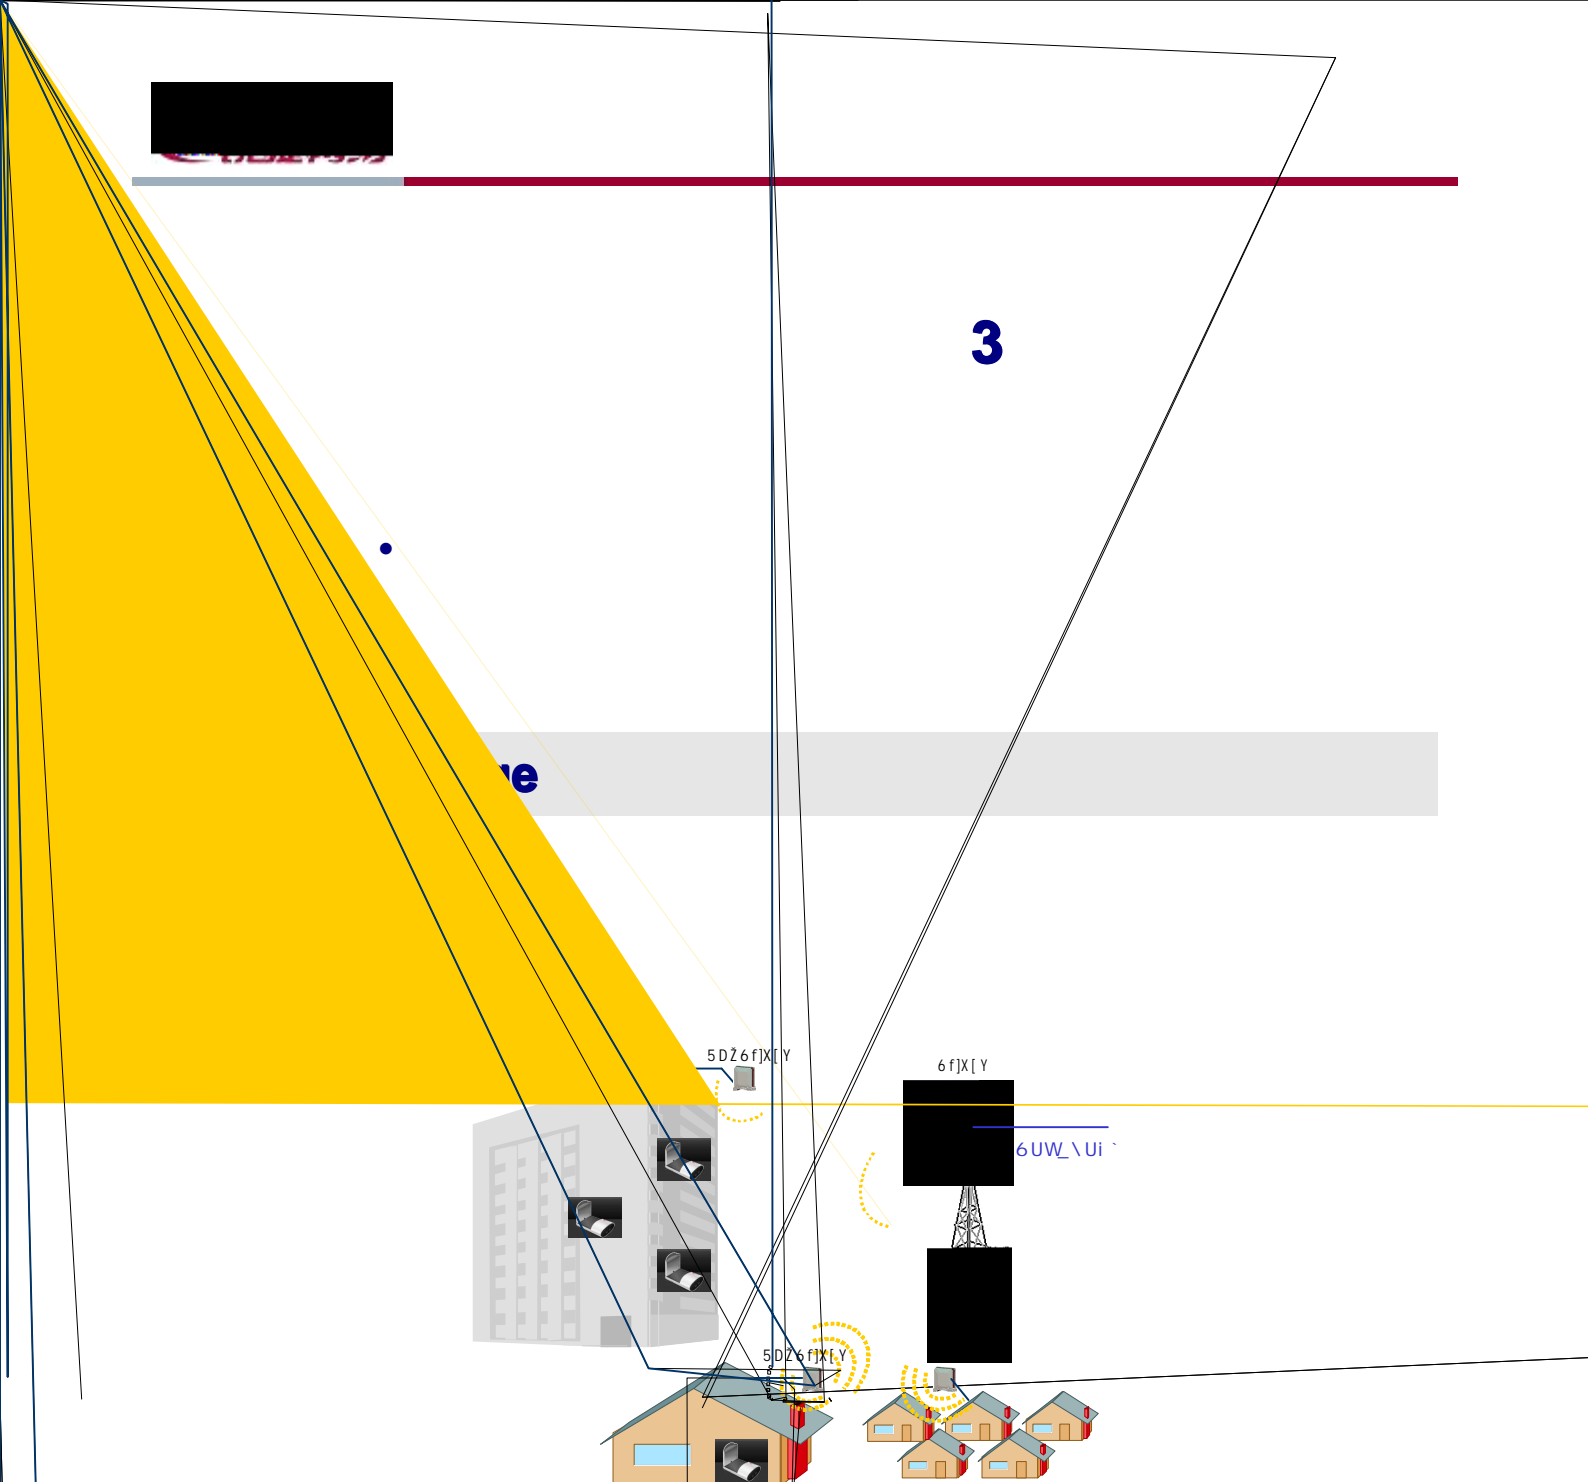

3.2 AP + AP



3.3 Bridge+ Bridge

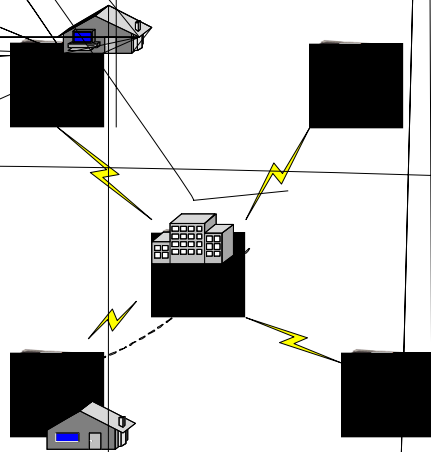




4

4.1

-
-
-
-
-
-
-
-
-
-
-
-

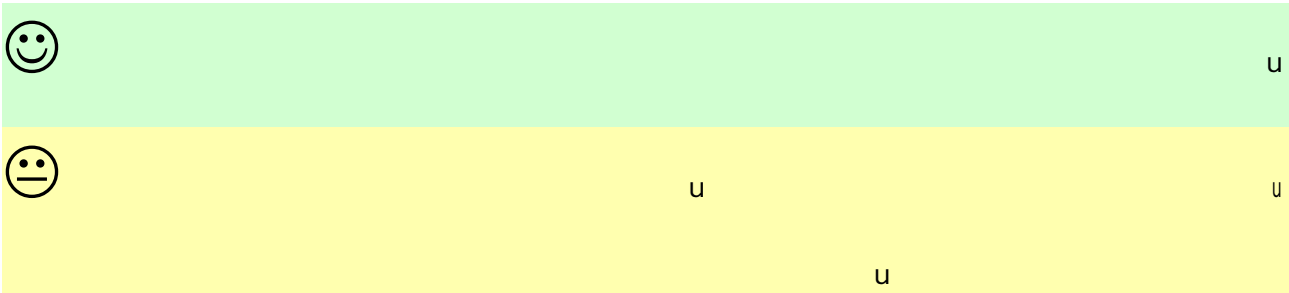



4.2

4.2.1



-
-
- **Reset**



Reset

Reset

u

4.2.2


-



-
- LAN
- Reset

4.2.3 LEDs

4.2.4 RF

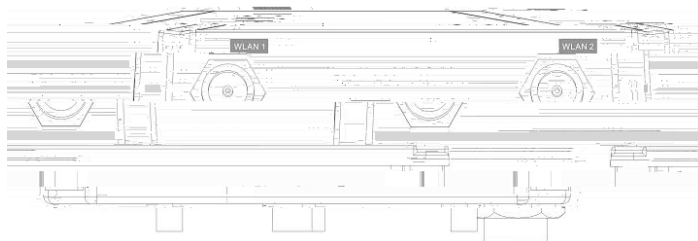




4.3

4.3.1 RG-P-780



u

4.





5.

6.

7.



u

8.

9.


4.3.2

1.

2.

PWR-LAN OUT


LAN-IN

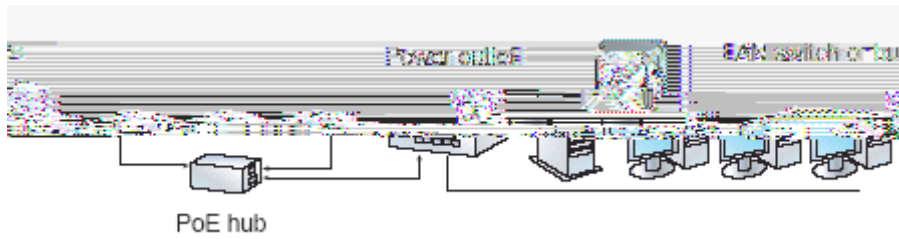




5

1.



2.




3.



admin

admin01

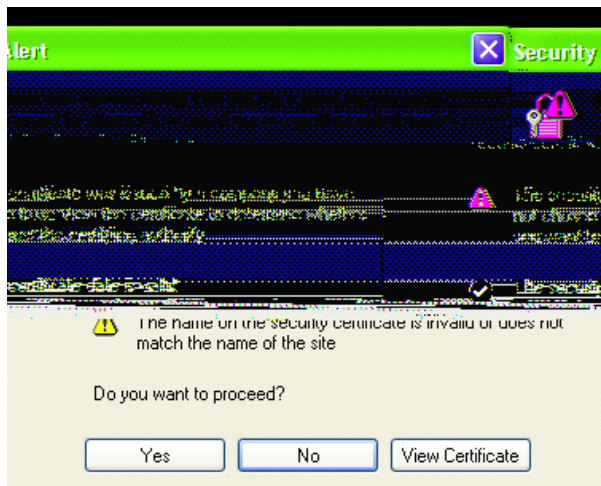



P780 Administration

User name:

Password:

Remember my password

OK Cancel

4.




§

<u





6

6.1

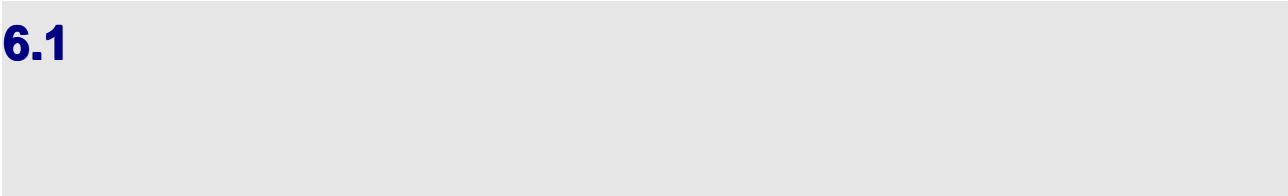



Frequency range	2400 MHz - 2483 MHz	5150 MHz - 5875 MHz
Peak gain	4.5 dBi	7.0 dBi
Average gain	2.5 dBi	5.0 dBi
VSWR	2.0 : 1 Max.	
Polarization	Linear, vertical	
Power handling	2 W (cw)	
Impedance	50 Ohms	
Connector	RP-N plug	

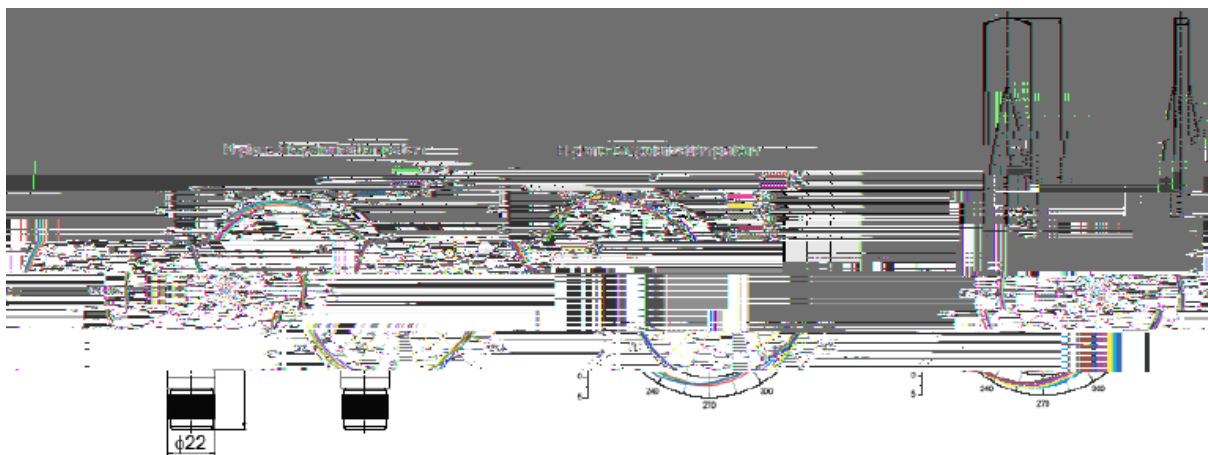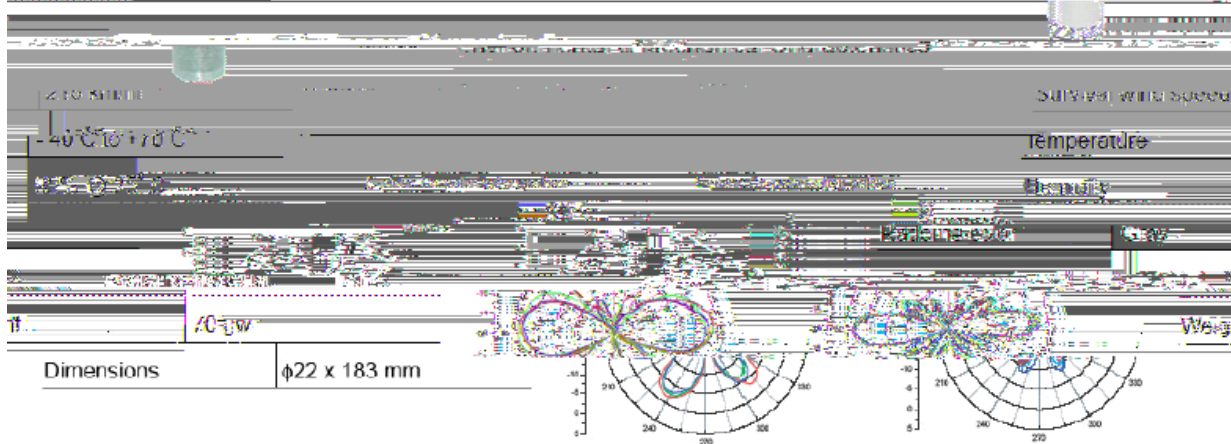

6.3

