



N eY

I JI *' \$0

I > F J (' % Ž* Y. - žg +

M(%

©2018

8D494neS 1 Tf 9 0 0 EMC /P <</1.38B 8D325A82D494neShC2_0 17q 159.3441803 33.72 162.01901C4

RGOS 10.4 (3b76)p4

<http://www.ruijie.com.cn/>

<http://webchat.ruijie.com.cn>

<http://www.ruijie.com.cn/service.aspx>

7× 24

4008-111-000

<http://bbs.ruijie.com.cn/portal.php>

<http://www.ruijie.com.cn/service/know.aspx>

4008111000@ruijie.com.cn

--	--

[] []

{x|y|...}

[x|y|...]

//

2)

(N eY

(%

I JI *' \$D

1.1.1

N \Y @ =i\]fo :_if d \

N \Y N \Y N \Y N \Y
N \Y @ =i\]fo :_if d \

1.1.2

N eY

N \Y N \Y ? KKG
? KKGJ KCJ (%)

N eY

N \Y N \Y N \Y N \Y N \Y
@ =i\]fo :_if d \ JX]Xi`

(%

1.2.1

N \Y

N \Y

@

N \Y N \Y N \Y

 @ =i\]fo :_if d \ JX]Xi` @ Ž D Xokf ež

 N \Y

 G: () / ' ! (') +

 (++ ' ! O ' ' N \Y

1.2.2

N \Y (O) %- / % %) , , % , , % , , % N \Y

X[d `e X[d `e N `e[f n j OG

N eY


N \Y	
N \Y	> < ' # (O) %- / % %
N \Y	X[d `e X[d `e

G: G: > < ' G:

G: @


G: \$> \$> @kie\k \$> "

(\$

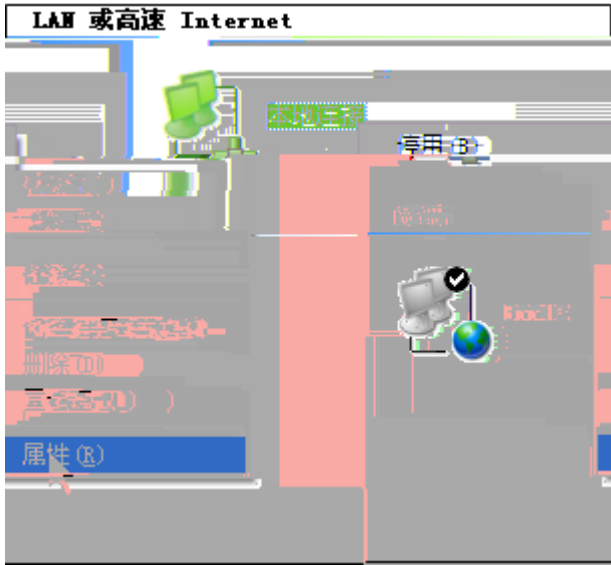

@Kie\k K: G&&

(\$)

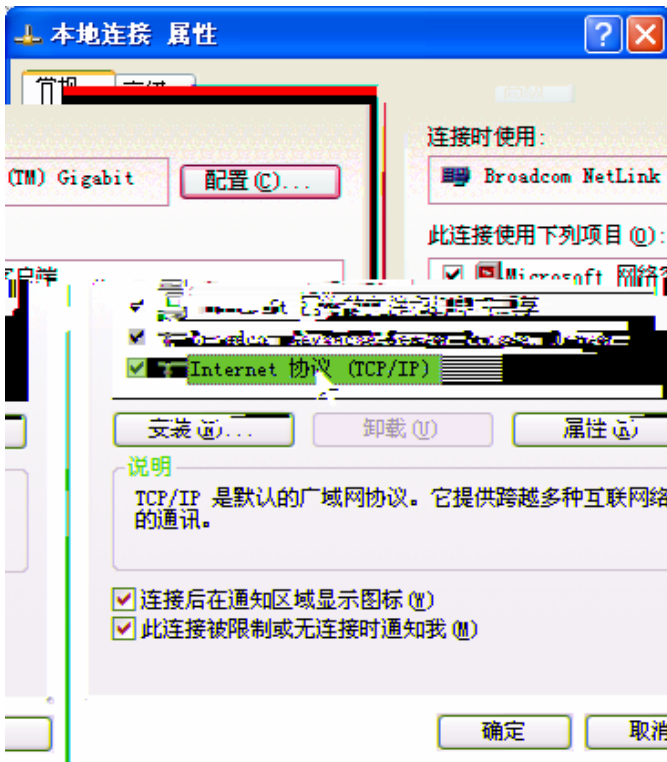

G: &

@Kie\k

K: G&&

&

&

(O) %- / % %oo ooo


) , +

), , %, , %, , %

(O) %- / % %

&

(\$*



⚡ (O) %- /%% G: Ⓞ (#

G:
G: \$> \$> Zd [\$>"
Ge^ Ge^ (O) %- /%%
(\$+

```
Pinging 192.168.1.1 with 32 bytes of data:  
Reply from 192.168.1.1: bytes=32 time<1ms TTL=64  
Reply from 192.168.1.1: bytes=32 time<1ms TTL=64  
Reply from 192.168.1.1: bytes=32 time<1ms TTL=64  
Reply from 192.168.1.1: bytes=32 time<1ms TTL=64  
  
Ping statistics for 192.168.1.1:  
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),  
    Approximate round trip times in milli-seconds:  
        Minimum = 0ms, Maximum = 0ms, Average = 0ms
```

(\$

```
Request timed out.
Request timed out.
Request timed out.
Request timed out.

Ping statistics for 192.168.1.1:
    Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),
```

⚡

⚡ G:

⚡ K: G&&

⚡

1.2.3 N eY

```
      N \Y                                N \Y
(ž                ><'
)ž                                @. %
*ž                @                @                (O) %- /%%000 000 ) , +
), , %, , %, , %                (O) %- /%%
@                _kkg &&(O) %- /%%                I JI                N \Y                ($

      N \Y                @/"                8ggd JX]Xi`                =i\]f o*%
```

(\$

欢迎使用 RSR路由器 WEB管理系统


 **登录**
请输入您的用户名和密码！



用户名：

密码：

[忘记密码](#) [忘记密码](#)

在线客服 

锐捷网络有限公司 RSR路由器 WEB

1.2.4 Net

(%%%)

IJI NY (\$

(\$/ NY



(\$/ NY




1.3.2


N \ Y

Ⓒ &D Xj b GGGf <ŽB; JCž

(\$ '

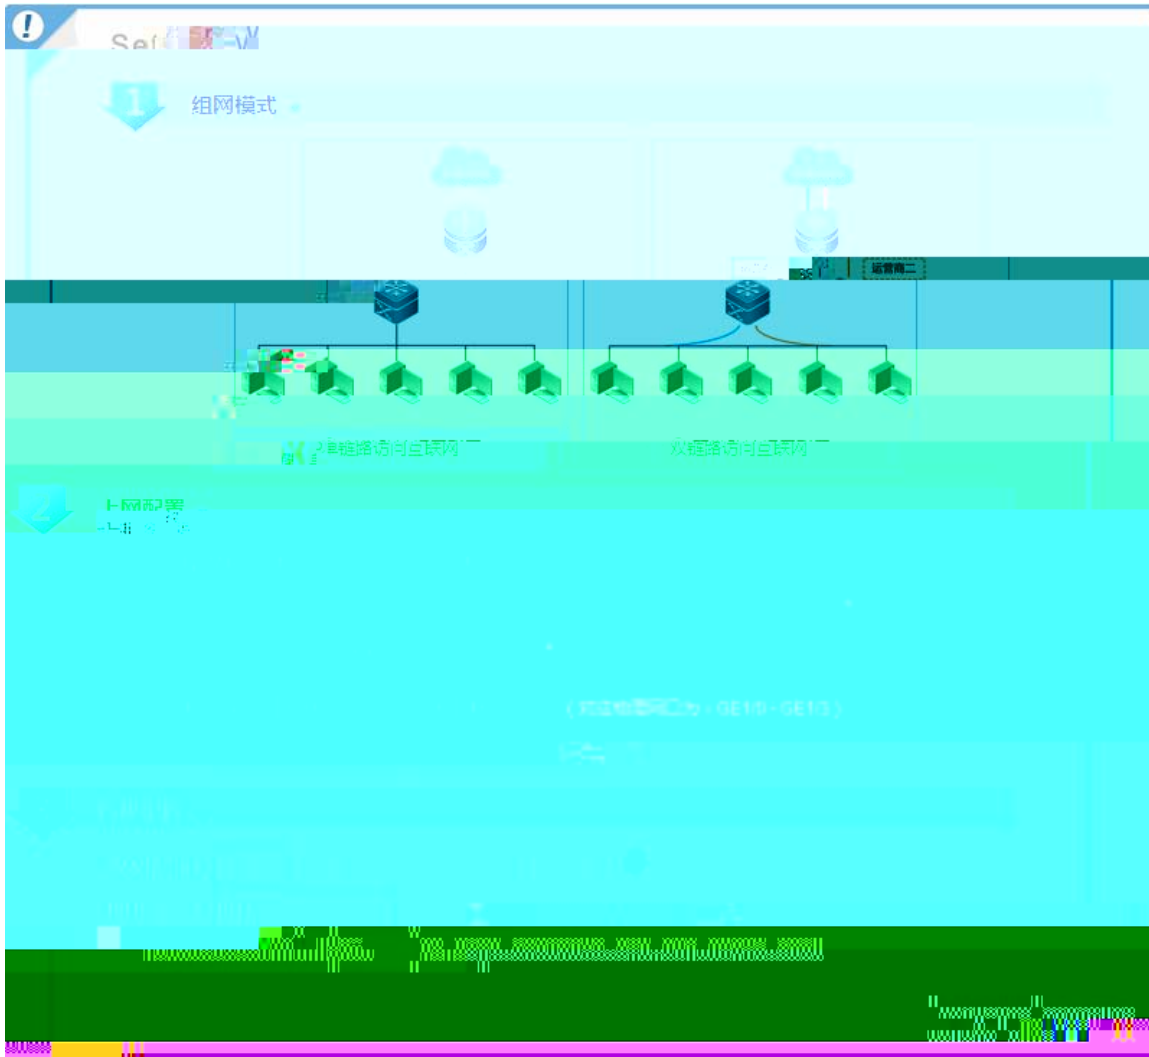


(S(

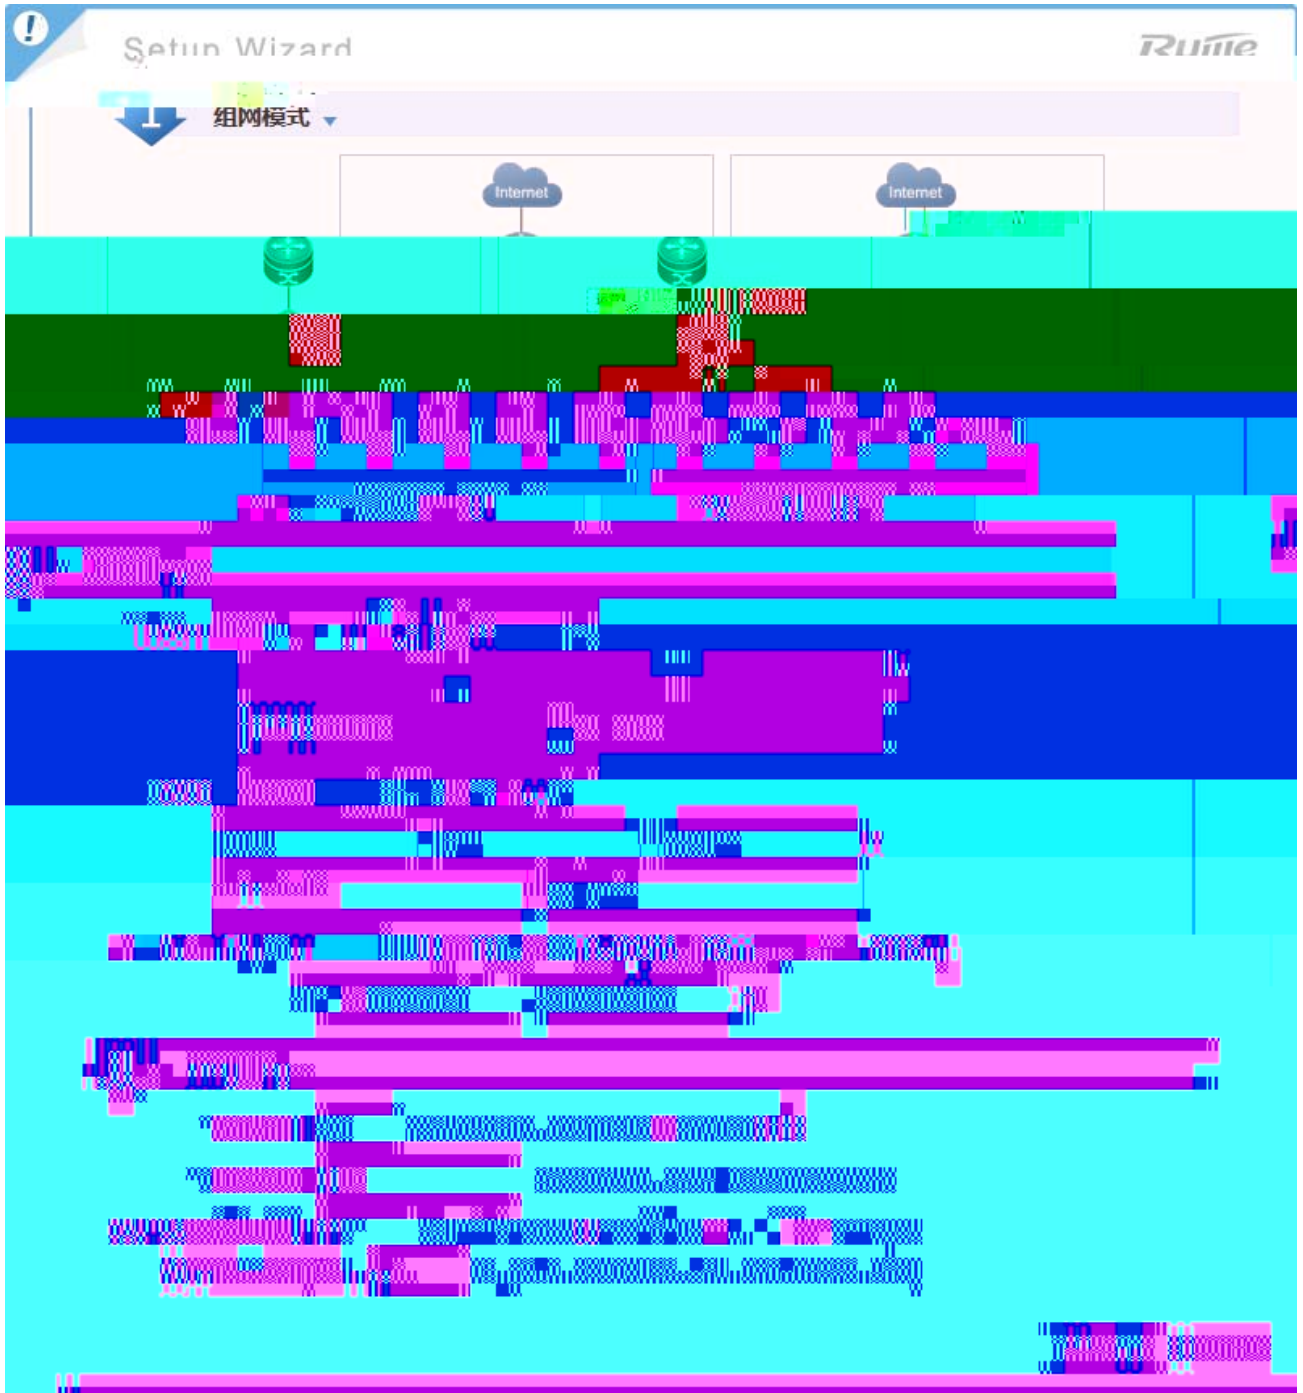

© &

; EJ (\$); EJ; EJ

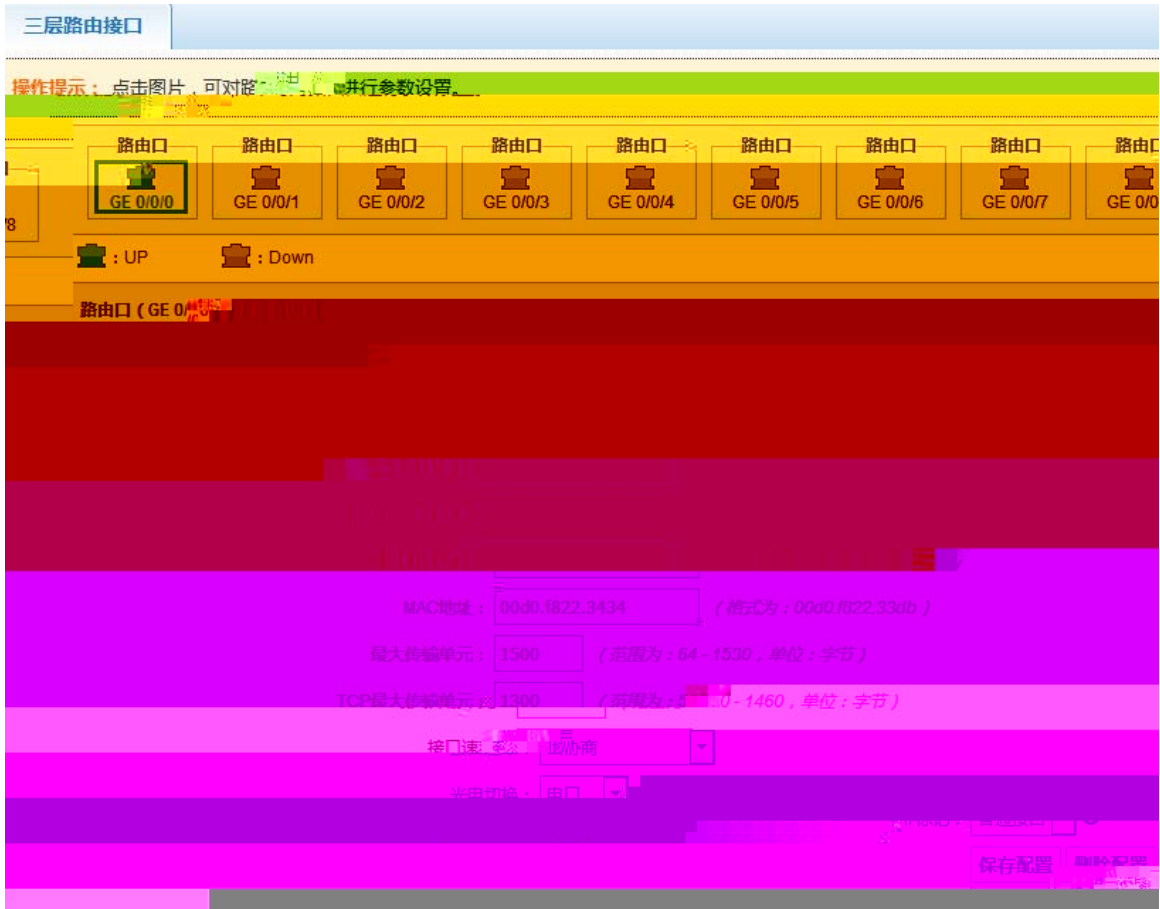

: <(

(S-



K: G L; G

Ⓜ Ⓜ Ⓜ
(-, *,
Ⓜ Ⓜ Ⓜ
(-, *,

(S.

添加端口映射

映射类型: 整机映射

内网IP: *

公网IP: 使用接口地址 GE0/0/8

确定 取消




(%%% ; ? : G

; peXd `Z ? fjk : fe]`^l iXkfe Gifkf Zf #; ? : G ; ? : G
Ⓞ ; ? : G Ⓞ Ⓞ Ⓞ

; ? : G

; ? : G ; ? : G

(\$)

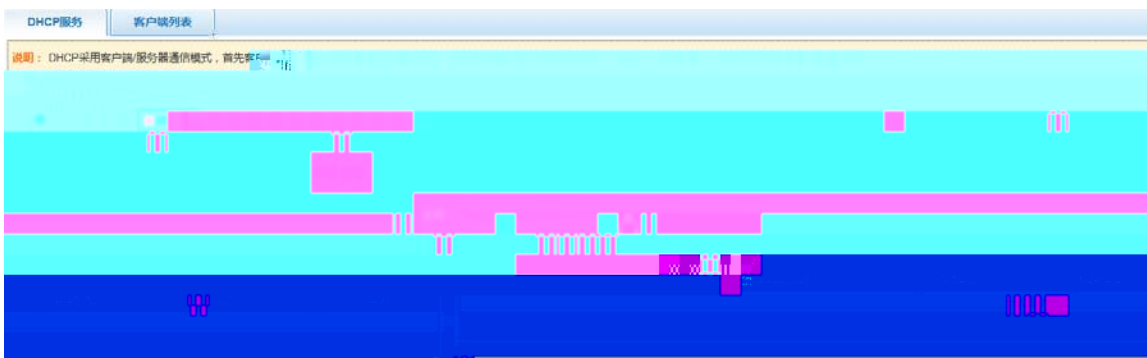

; E J

C8E

(\$)



Ⓞ

Ⓞ

Ⓞ

; ? : G

; E J

; E J

; E J

; E J

Ⓞ

; ? : G

Ⓞ

D 8:

Ⓞ

(\$) *

添加静态地址池 [X]

地址池名称: * (请勿输入 & ? % 和空格等字符)

IP地址: *

掩码地址: *

MAC地址: * (格式为: 00d0.f822.33db)

网关地址:

首选DNS:

备用DNS:

确定 取消

Ⓞ Ⓞ

Ⓞ

D 8:

D 8:

ž ž

; E J

; E J

ž ž



D 8:




(%%% M I G

M I G



M I G

(\$)+

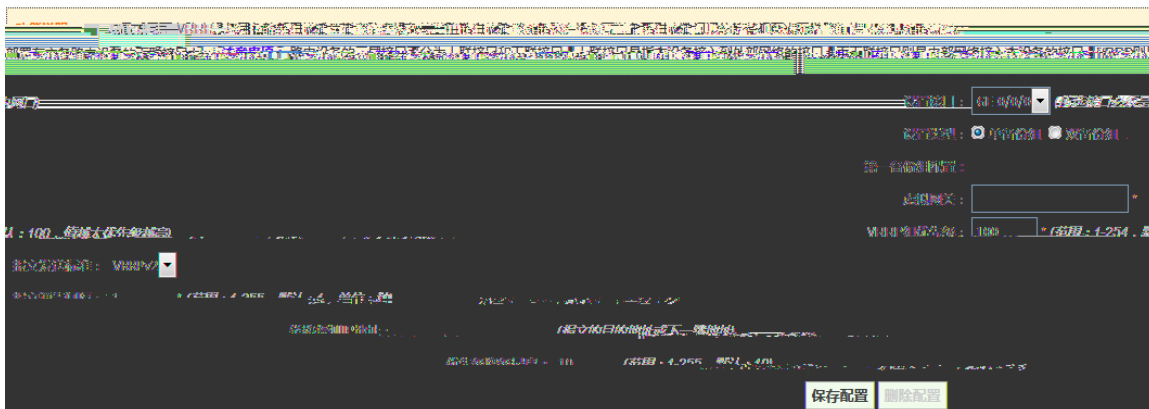


(%%%) J E D G

J E D G J 'd g\ E \k n f i b D X e X ^ \d \ek G i f k f Z f c

J E D G

J E D G


(\$),

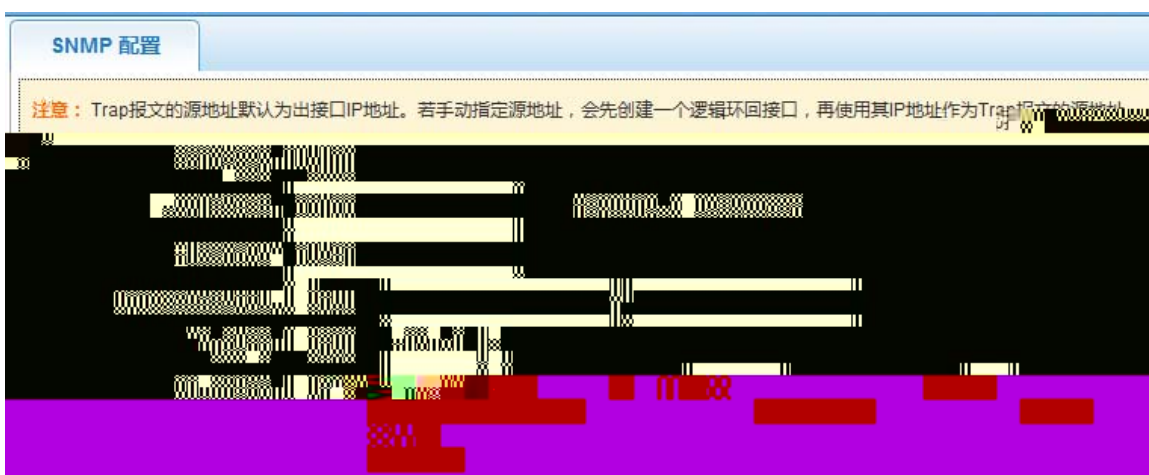

1.3.4

(%%%)

(\$) -

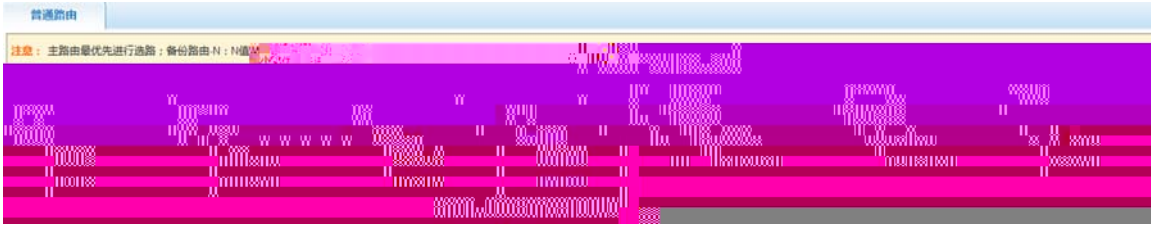

Ⓞ


Ⓞ

Ⓞ

(

' %%%

(\$) .

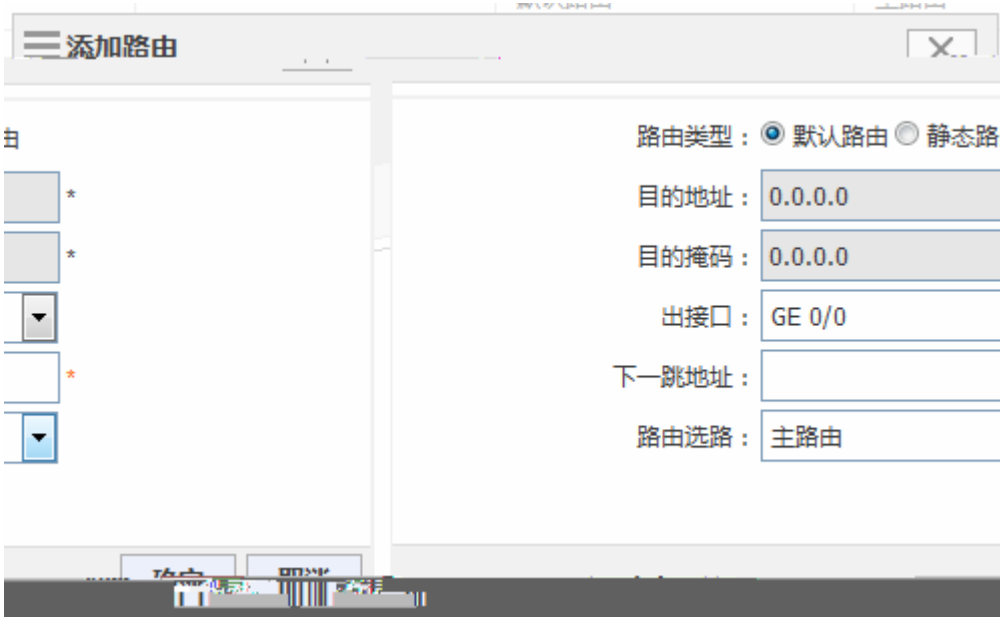

(% % %

G9I Gf cZp\$9Xj \[I f I Ke ^

Ⓞ

(\$) /



F J G=


F J G=

F J G=

F J G=

F J G=


(\$*

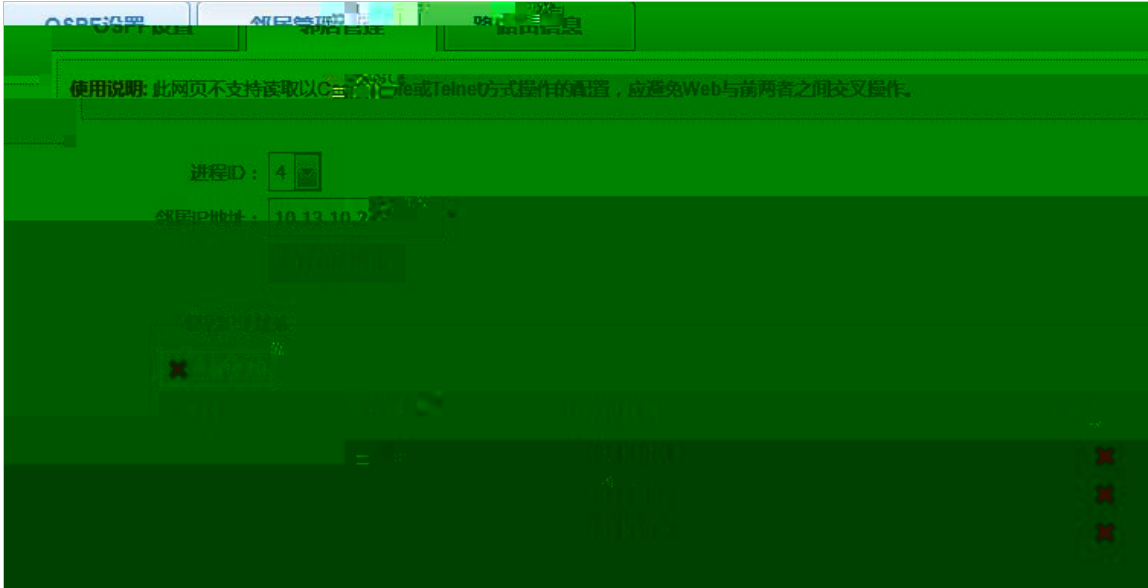

(\$*




(\$* +

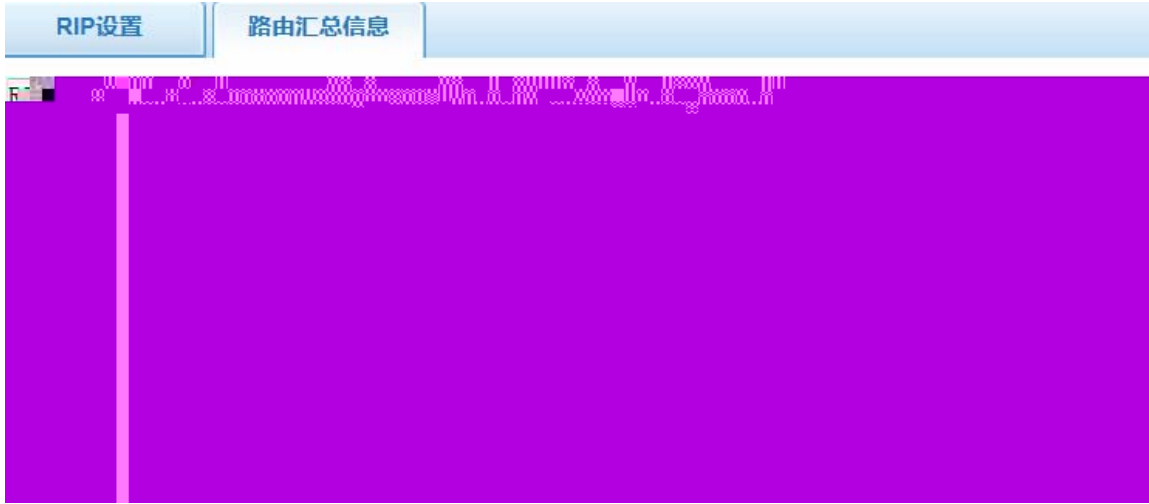

(%%%

F

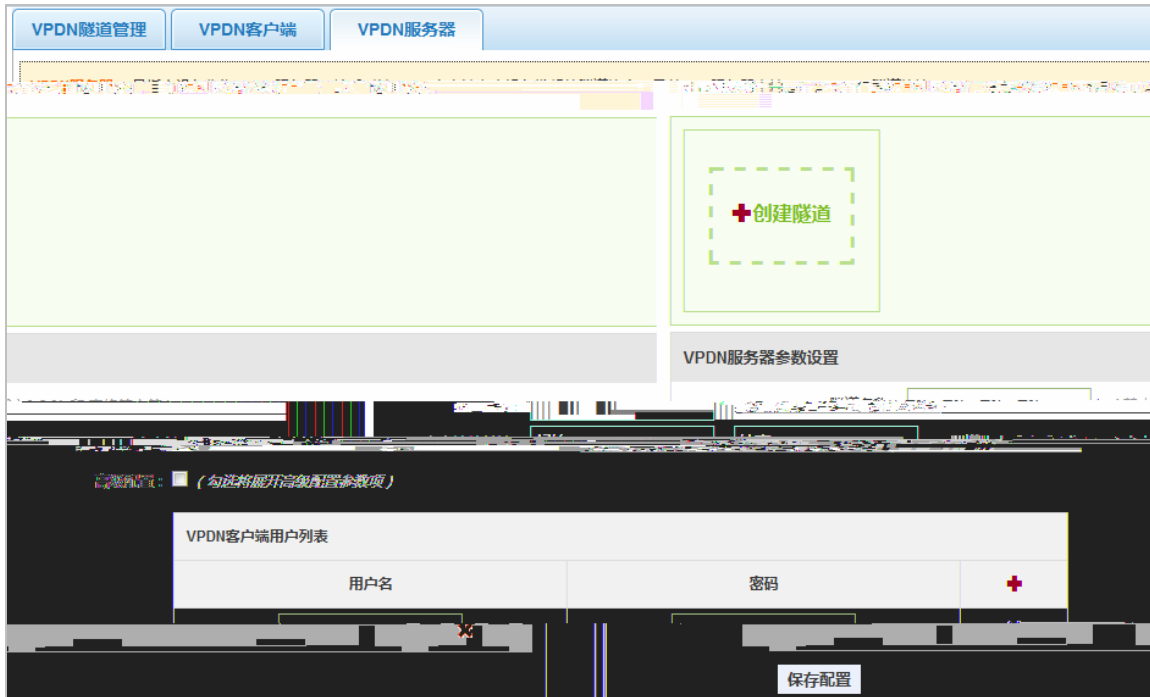

(%%% >| <

>| < >| <

>| <

>| <

(\$*0



(%%% @JeZ MGE

MGE

@Kie\k

@Kie\k

@J\Z


@J\Z

@JeZ

@J\Z

@J\Z D @

(\$+

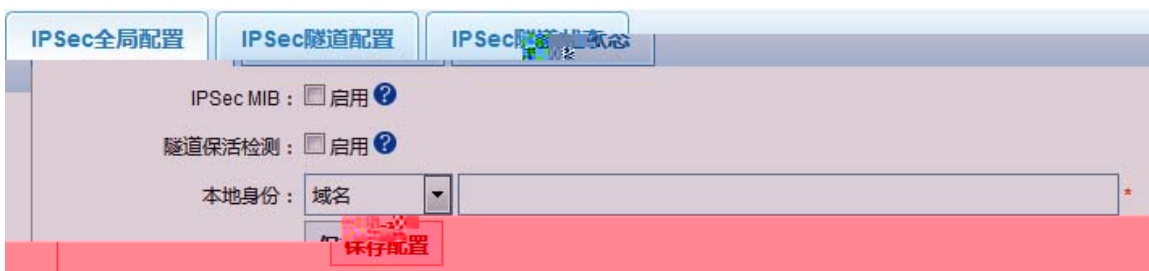

ⓂJeZ

ⓂJ\Z

Ⓜ ⓂJ\Z Ⓜ - Ⓜ

ⓂJ\Z


MGE

Ⓜ<

Ⓜ<

; <J *; <J 8<J JD (J? 8 D ; ,
<JG\$ <J <JG\$*; <J <JG\$*; <J <JG\$? 8\$? D 8: <JG\$*; <J <JG\$D ; , \$? D 8: <JG\$ <J
<JG\$? 8\$? D 8: <JG\$ <J <JG\$D ; , \$? D 8:

(\$+(

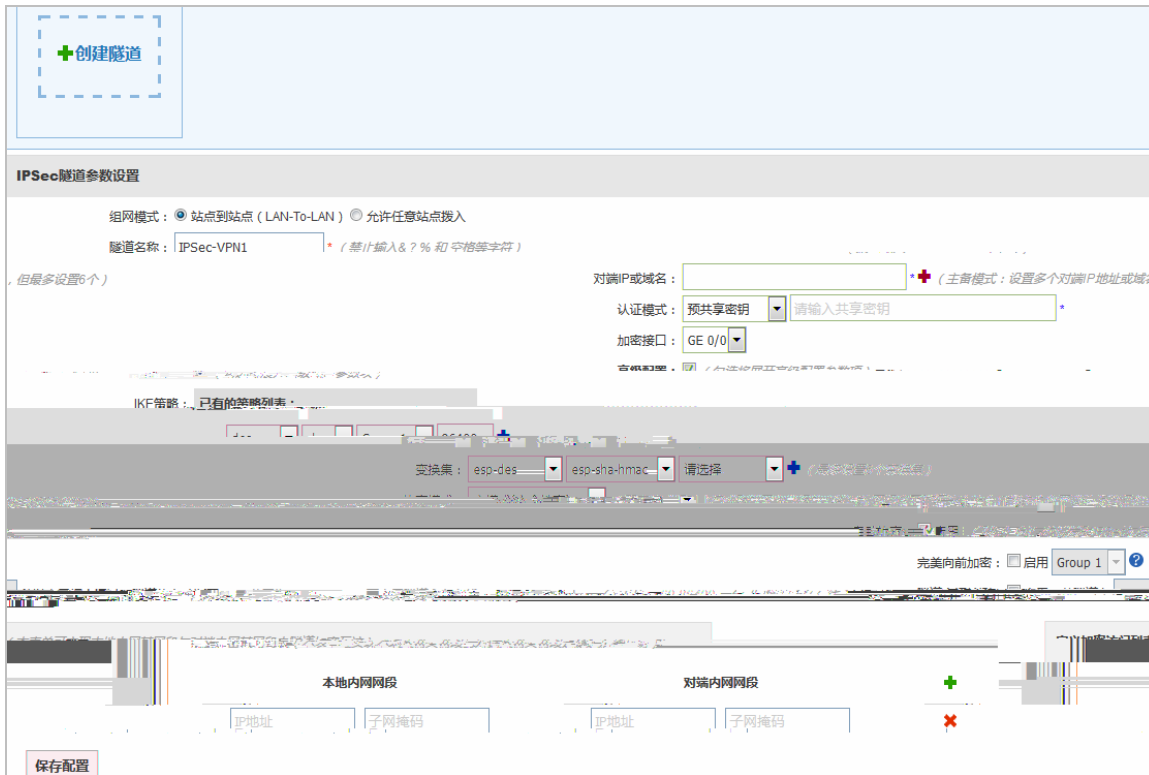

ⓂJeZ

ⓂJ\Z

(\$+)




1.3.6

(%%%)


(\$+*



(\$++

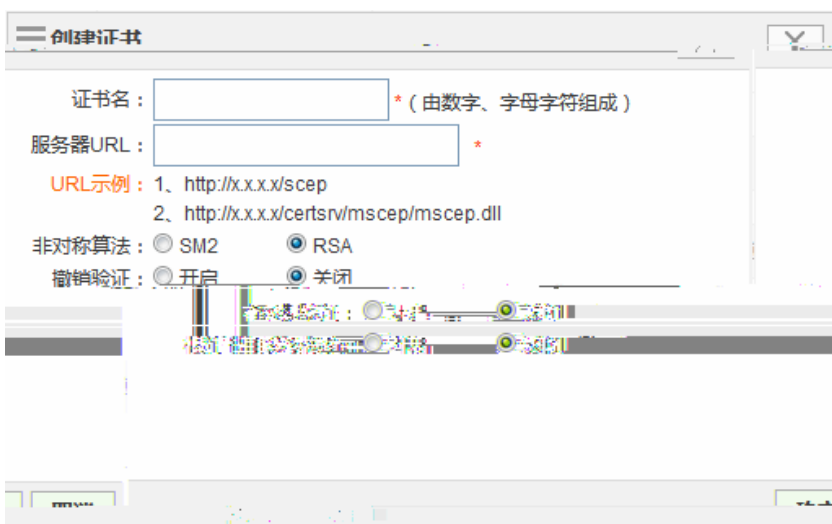

(\$+,

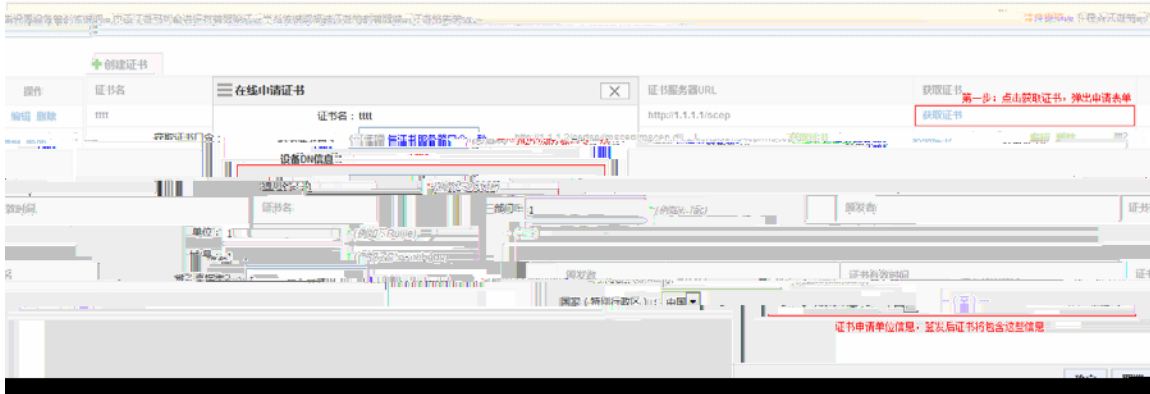

(%%%)

(\$+-



(\$+.

离线导入证书

证书名: ty

证书类型: 数字证书 签名证书 加密证书

设备DN信息

通用名: * (例如: 20_14E)

部门: * (例如: Tac)

单位: * (例如: Ruijie)

城/县: * (例如: Chengdu)

省(直辖市): * (例如: Sichuan)

国家(特别行政区): 中国

证书请求: 导出

证书ID: 1234567812345678

根证书: 未选择文件. *

路由器证书: 未选择文件. *


完成 取消

(% ; E

)%


G:

(\$+/
*

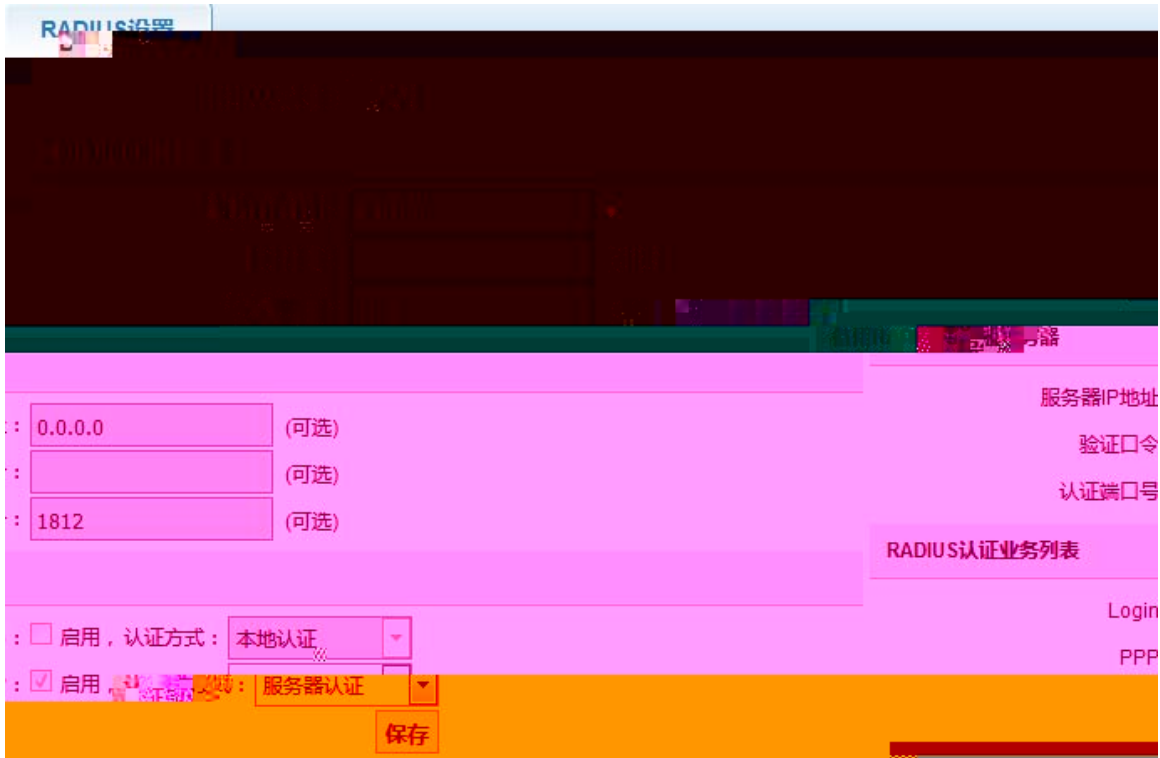

1.3.8

(%%%)

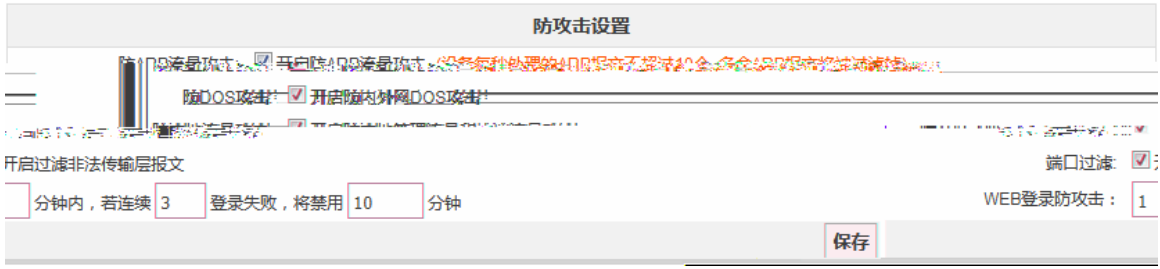


(%%% @SD A:

@SD A:

@SD 8: @SD 8: @SD 8: @SD 8:
8I G @SD 8:
@SD 8:

(\$ (

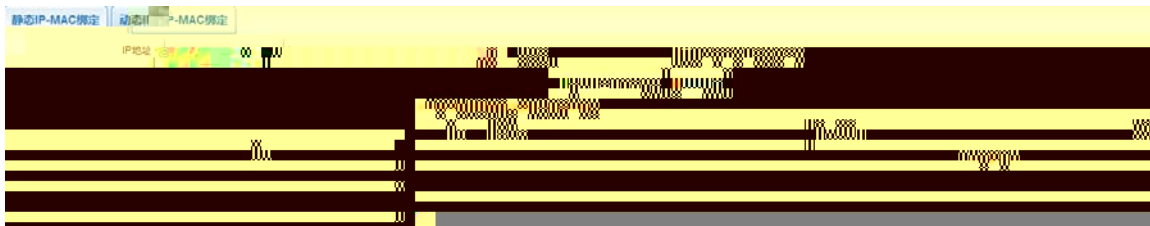

@SD 8: @SD 8:
D 8: @SD 8: D 8:


@SD A:

@SD 8: 8I G @SD 8:
@SD 8: @SD 8:

(\$)




(\$,

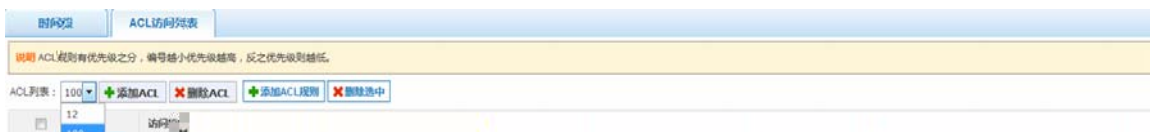


8: C 8: C 8: C 8: C

(\$ -



8: C 8: < 8: C 8: C 8: C 8: C

(\$.

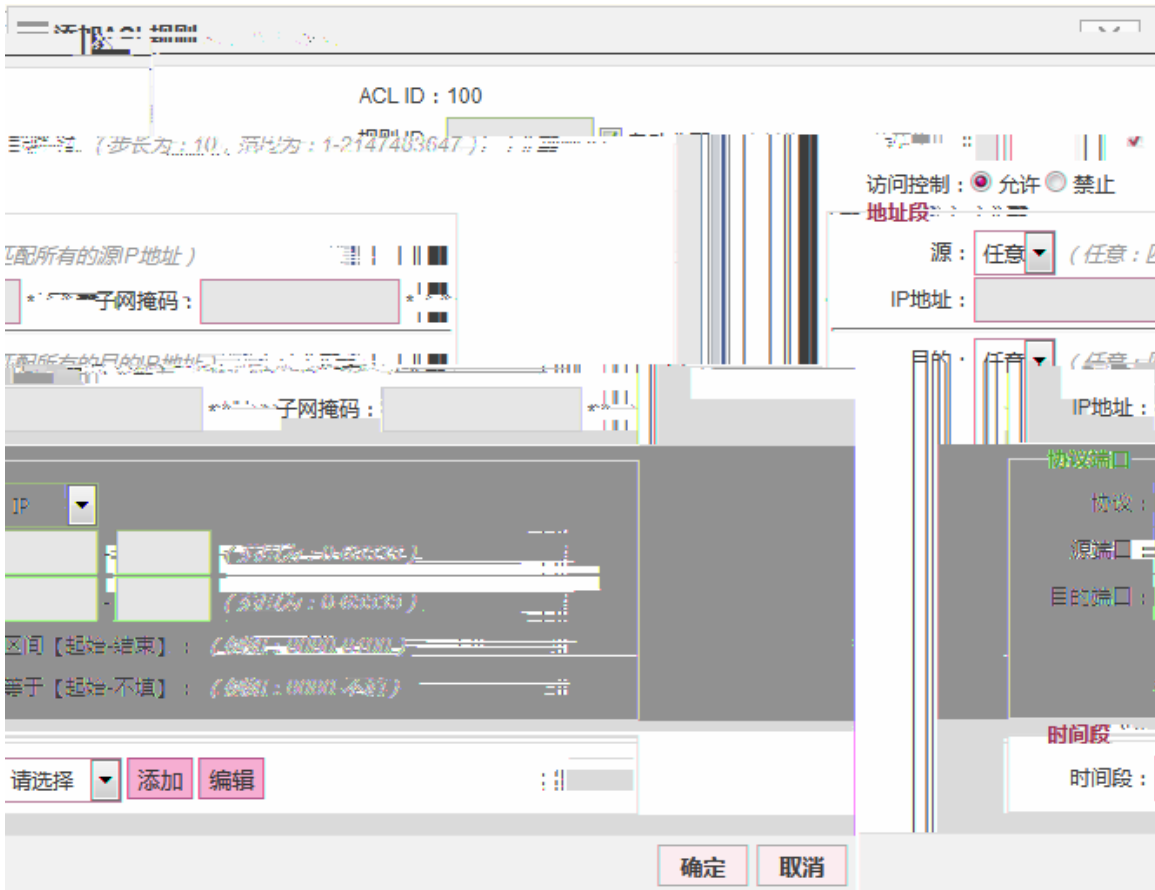

8: <

(\$) (+ . + / * - + .



1.3.9


(% % %

@ D G = f f [L ; G = f f [

(\$ /



(\$ 0

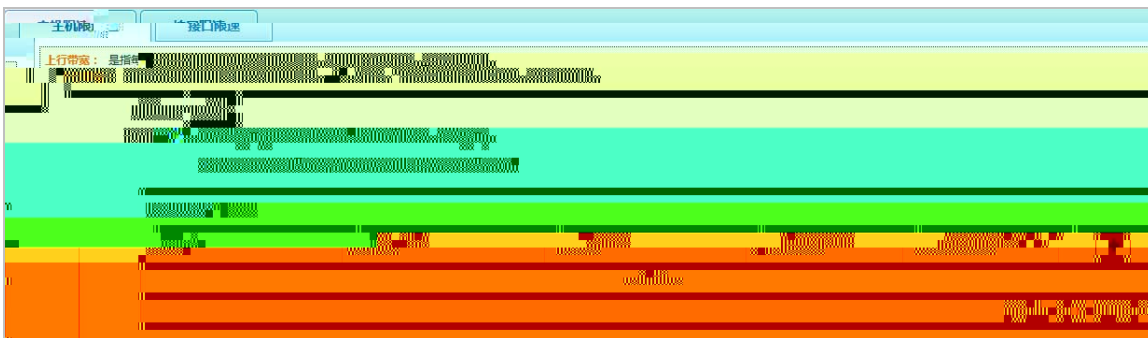

添加用户限速

用户名: (可输入数字、字母、下划线、横线 and 中文)

带宽设置

带宽(1-500): Mbps * 上行带宽(1-500): Mbps * 下行带宽:

地址段

子网掩码	+
<input type="text"/> *	<input checked="" type="checkbox"/>
<input type="text"/> *	<input checked="" type="checkbox"/>
<input type="text"/> *	<input checked="" type="checkbox"/>
<input type="text"/> *	<input checked="" type="checkbox"/>

用户IP或网段	
<input type="text"/> *	<input type="text"/>
<input type="text"/> *	<input type="text"/>
<input type="text"/> *	<input type="text"/>
<input type="text"/> *	<input type="text"/>

时间段

时间段名称:

时间段	00:00 - 23:59	00:00 - 00:00
星期二	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
星期三	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
星期四	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
星期五	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
星期六	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
星期日	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
星期一	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>

确定 取消


N \ Y




(% % %



(\$ '

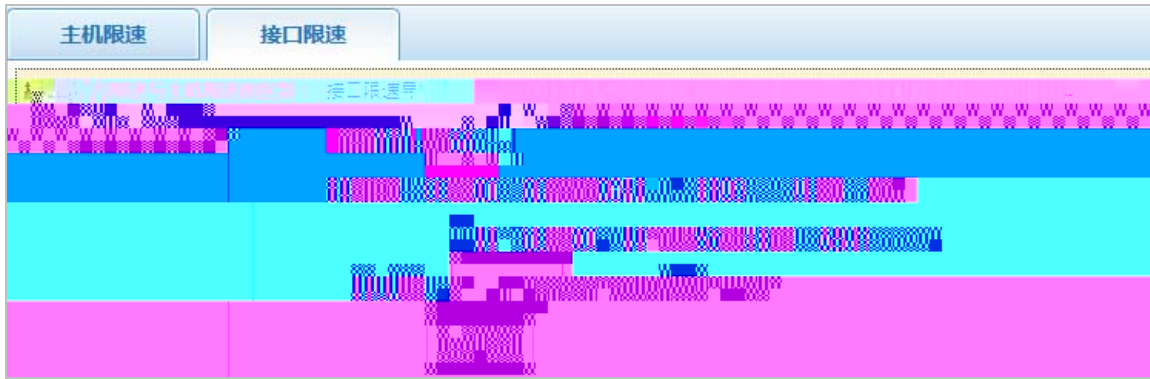

(\$(

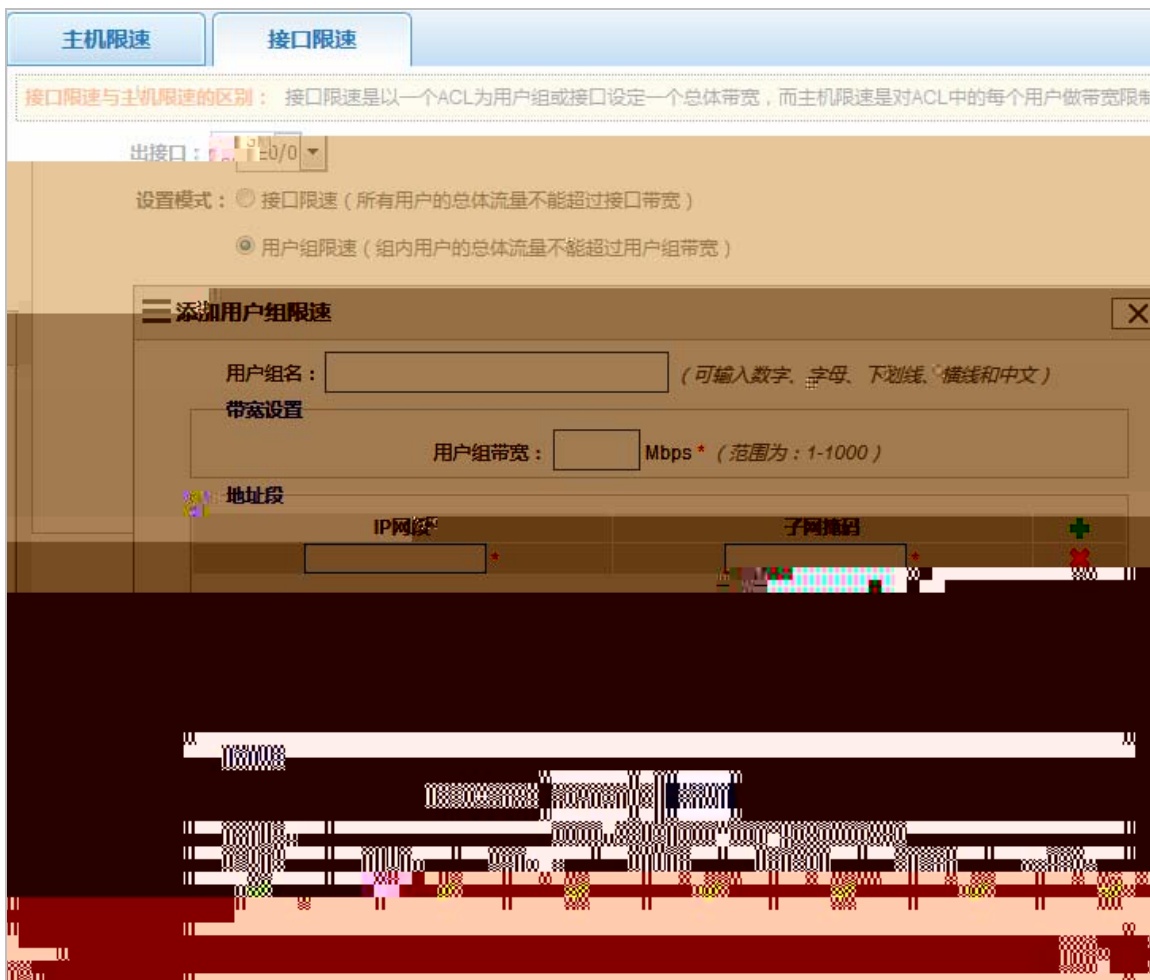

添加保障业务

业务名称： (可输入数字、字母、下划线、横线和中文)

带宽设置

保障带宽： Mbps * (范围为：0.5-95)

地址段

源地址： * 子网掩码： *

目的： (任意：匹配所有的目的IP地址)

IP地址： * 子网掩码： *

协议端口

协议： IP

源端口： - (范围为：0-65535)

目的端口： - (范围为：0-65535)

高级设置

IP优先级 (D)

DSCP: EF

绝对优先保障 (建议只对语音、视频等业务勾选)

N \ Y

Ⓢ Ⓢ

设备名称:

(%%' %

@kie\k

G:

注意事项：
1. 升级系统固件 (.bin) 文件上传完成后，必须重启设备才能生效。

版本信息

软件版本： RGOS 10.4(3h76)n4 Release(222386) [各
WEB版本： 1.2.3

软件升级

文件路径： 未选择文件。

升级进度：

状态提示：未指定升级文件。

Y'e N \Y l g[]\j _

(%%' %) N \Y N \Y

设备重启

提示： 重启过程需要几分钟左右的时间，请耐心等待！


(%%' % %\ok

Zf e]`^%ok

⚡ Zf e]`^%ok




(\$)

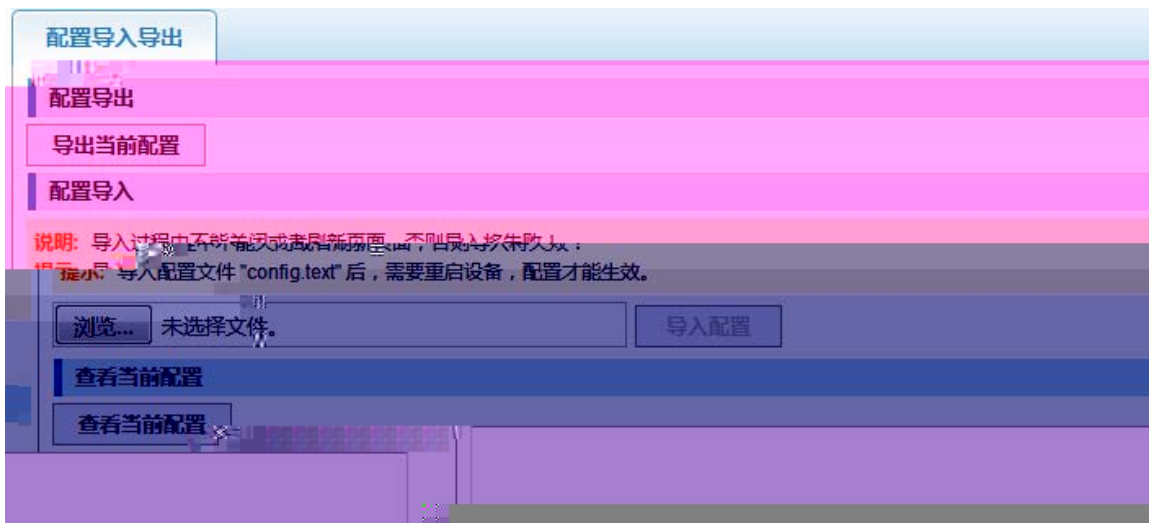

(%%' %

(\$ *

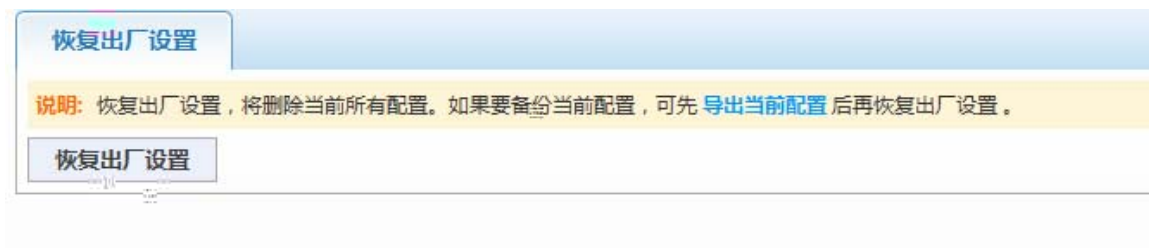


(%%' % : C@

: C@ N \Y : C@

: C@ : C@ : C@

(\$ +

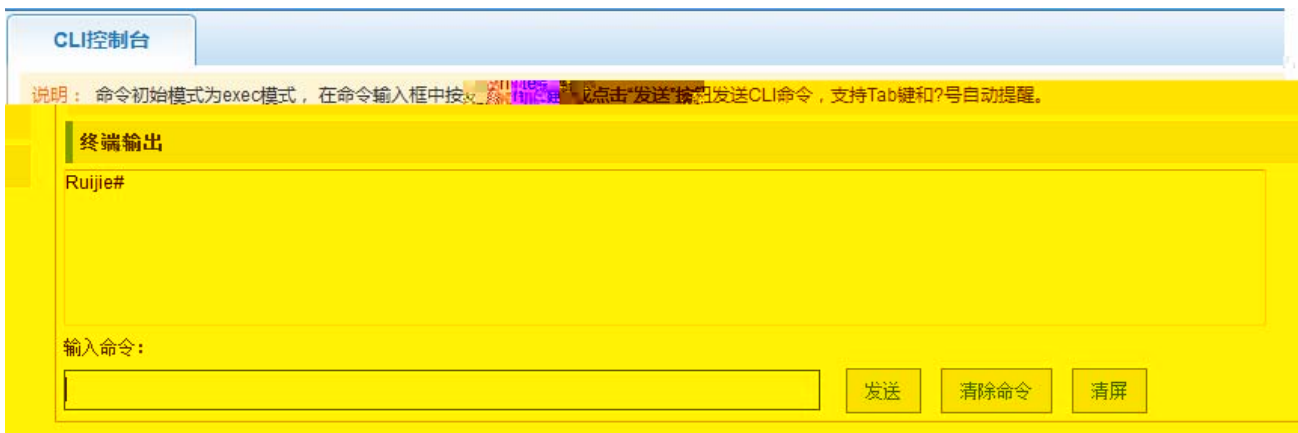


(%%' %


]xj_ #



(\$,

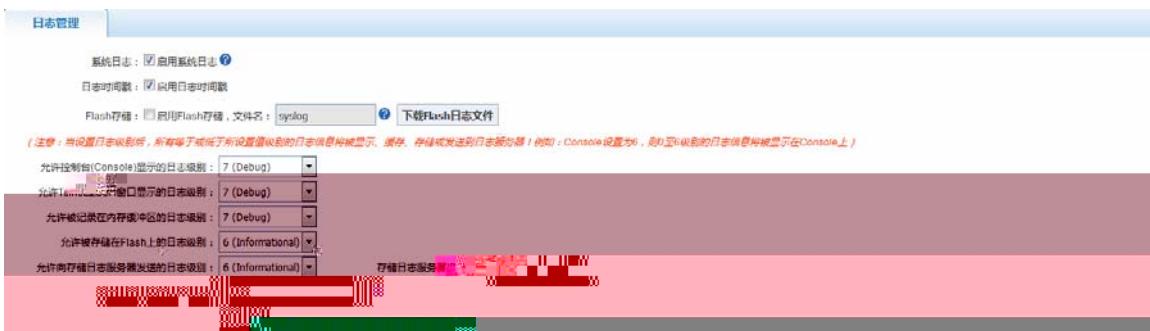

(\$ -

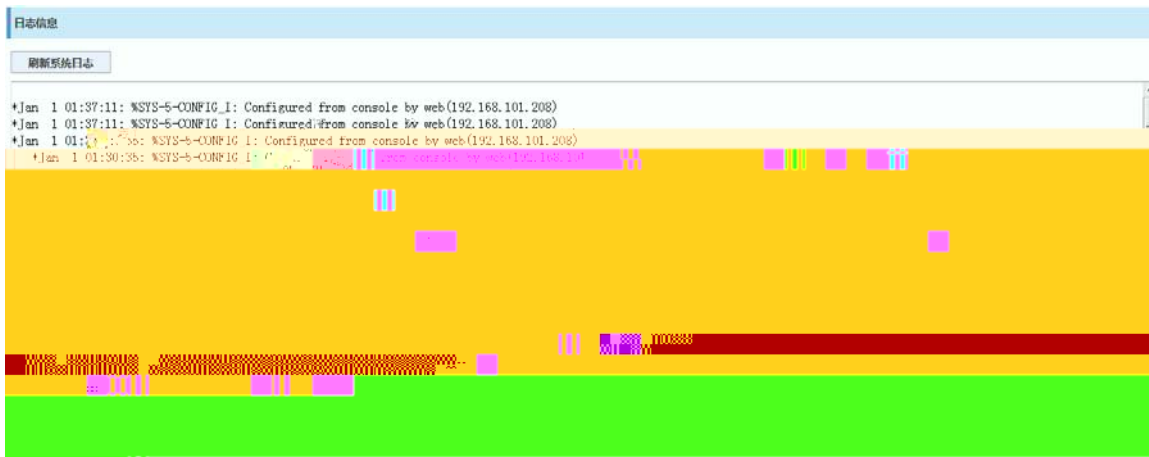


1.3.11

Ge^

(%%(% Gieg

(\$.

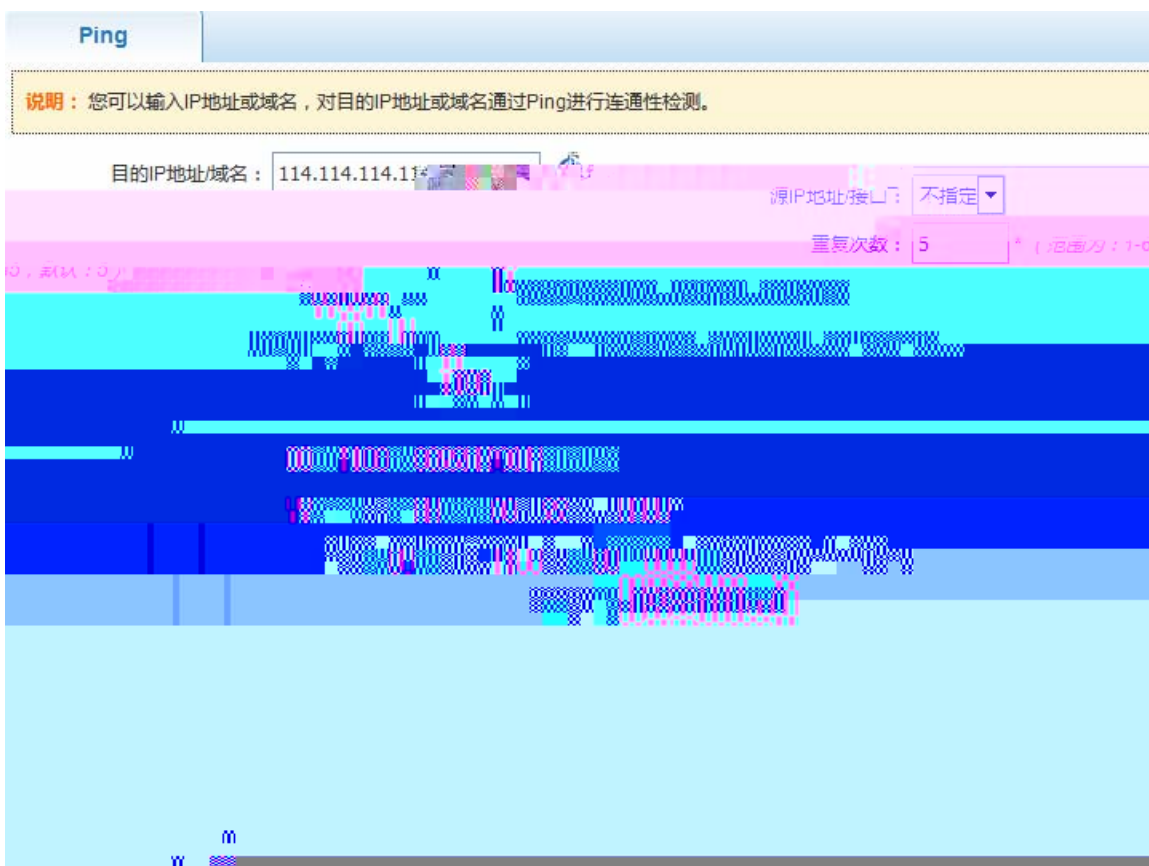

(%)


1.4.1

N \ Y


(\$' N \ Y



(\$ (N \ Y

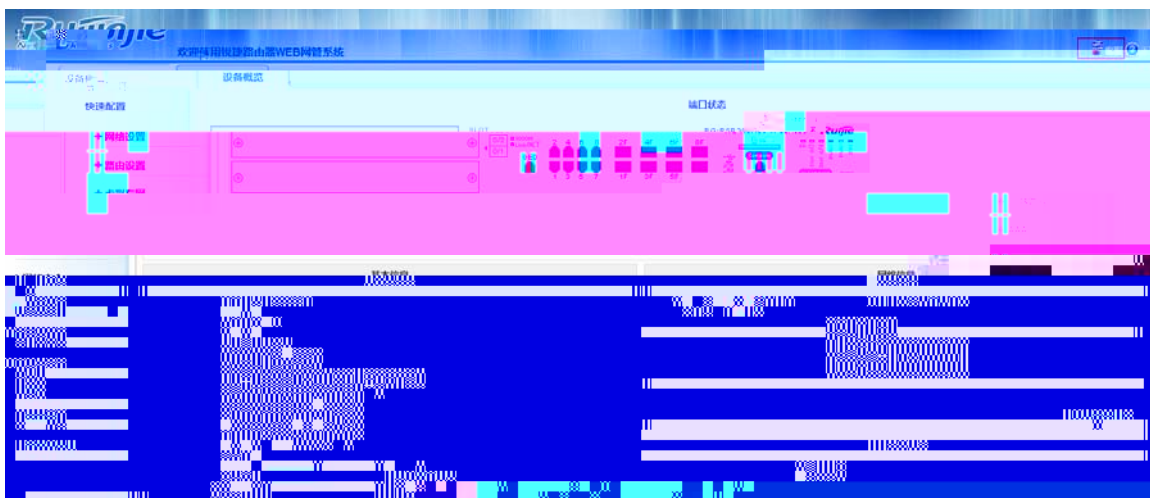

(\$)

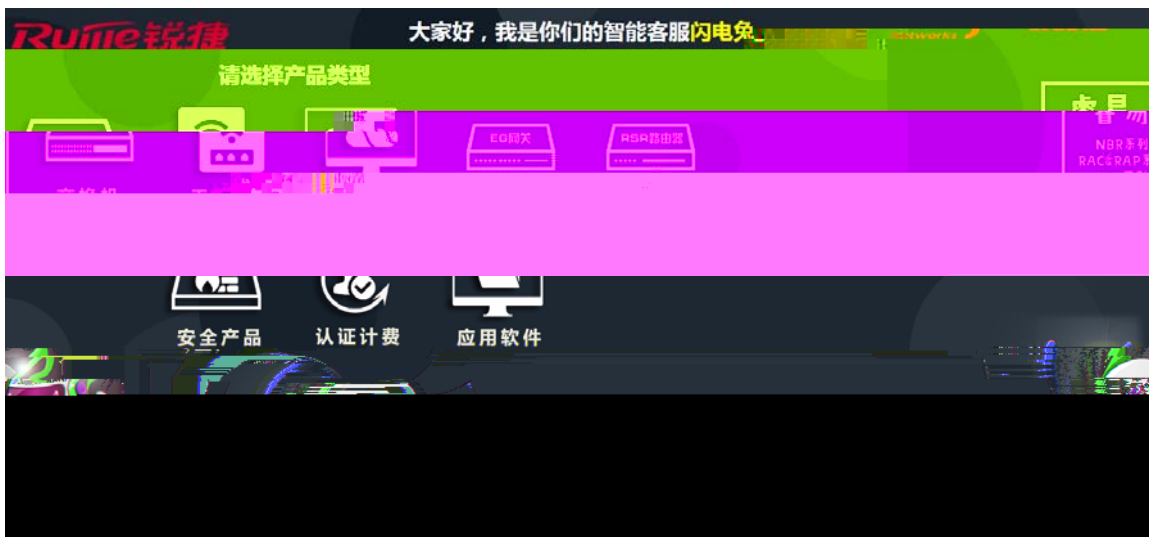

1 /r' \$/1'

+' /\$((('\$''

N \Y

N \Y

1.4.2

[_kg 1&n n n %d `a\%f d %e](#)

+' /\$((('\$'' N \Y

N \Y

(\$/*



(%

1.5.1

Web

Ctrl + 0

Ctrl + "+"

Ctrl + "-"

+" "

1.5.2

Web

IE8+ Firefox Google Chrome 8ggΔ JX]Xi` *- '

1.5.3 N eY

N \Y

N \Y

G:

(%%

1.5.4 N eY

(G: Ge^

N \Y

N \Y

(\$+ N \Y

```
Ruijie(config)#show service
ssh-server : disabled
telnet-server : enabled
```

[]XYΔ[

N \Y

\eXYΔ.j\imZ\ n\Y\$ \im\i Xα

N \Y

) G: Ge^

G:

Ⓔ

* + + N \ Y N \ Y
(\$,



1.5.5 N e Y

N \ Y (' N \ Y N \ Y ('

('
